EASIBELT

BELT ADJUSTMENT GUIDE

Belt Tracking to one side at the discharge point.

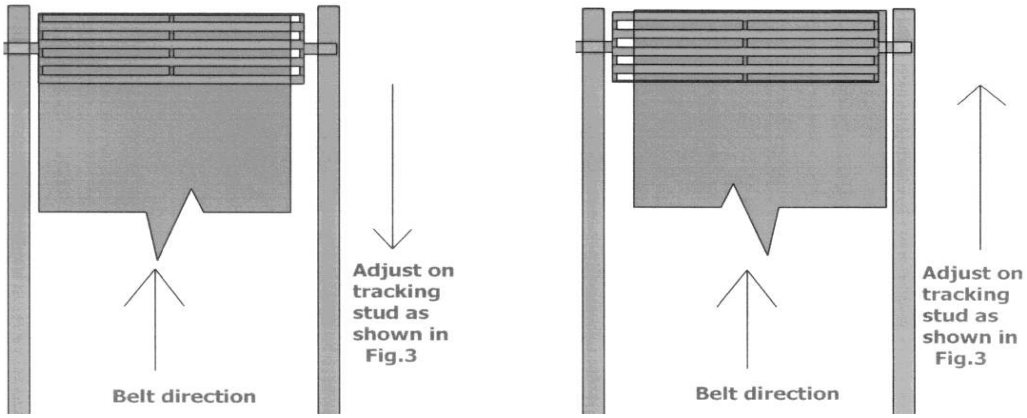

Belt Tracking to one side at the loading point.

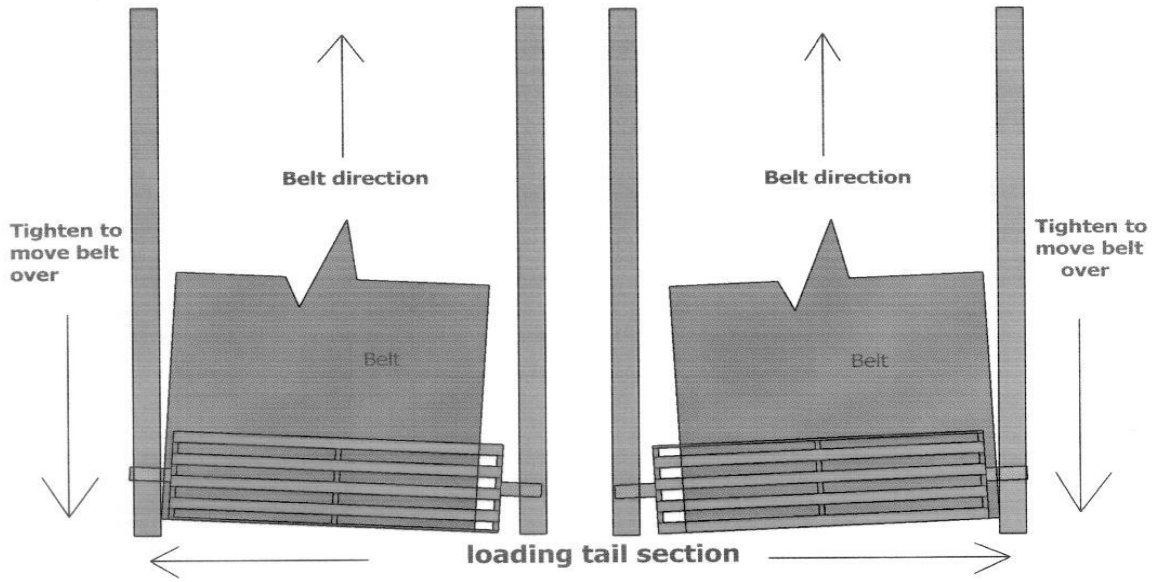

Fig 3. Specific Easibelt Tracking Adjustment Stud

DO NOT ADJUST. This nut should stay in position.

Loosen these 2 nuts, adjust as above diagram, then RETIGHTEN to lock off.

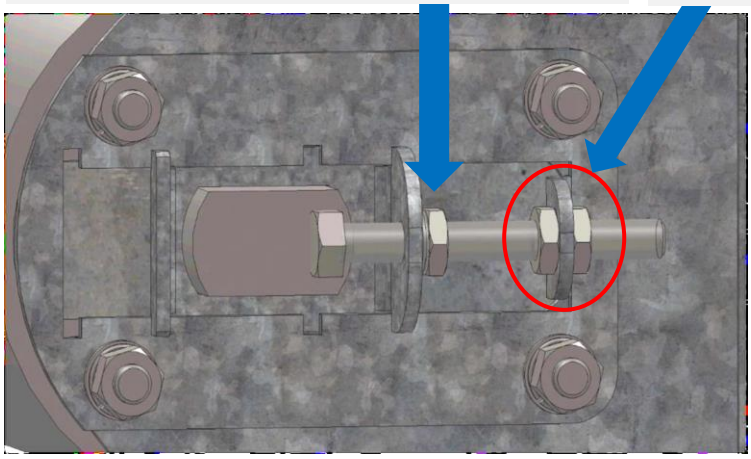

Note:

Each side should be adjusted incrementally, to keep the tracking in control and avoid fast misalignment.

For belt tension, each side should be adjusted the same amount. The best tension for the belt is the minimum to stop it slipping.

COVEYA